

TIPS FOR USING











Hotel

nursery school

bathroom

home improvement









office

rest home

kitchen / industrial kitchen

decoration









design

architectural curved

toys

laboratory





elements





nautical industry

hospital

pvc flooring and carpet

joints for tiles







school



greenhouse



roofing

recyclable



ecological



fire-resistant



lightweight



safety items



customized



water resistant



weather resistant



UV resistant



energy saving



light transmitting and high brightness



It's a registered trademark of **Trafilplast** srl



COMPANY

- 5 The highest respect for life
- 6 Trafil, company images

HOME IMPROVEMENT AND TECHNICAL PROFILES

- 10 Colors
- Finishing profile 12
- Quarter circular 14
- 15 Corner covers
- 16 Shock-resistant corner covers
- 17 Corner covers
- 20 Skirting boards
- 24 Multisystem skiting board
- 26 Multifunction skirting board
- 27 Skirting boards and cover skirting
- 28 Square skirting board
- 29 Round skirting board
- 30 Flexible skirting boards
- 33 Shelled skirting boards
- 38 Scotia
- 40 Stair nosing profiles
- 43 Flooring profile
- 44 Connector profiles
- 45 Sanitary connectors, joints and triangular chamfer strip
- 46
- 47 Rolling shutter belt and reinforced profile
- 48 Jolly profiles and strip profiles
- 50 Wall guard
- 51 Light switch finger plates
- 52 Polycarbonate sheets
- 53 Safe crystal
- 54 Safe mirros and multiuse PVC sheets
- 56 Synthetic glass and meters roll glass
- 58 Multiuse polypropylene sheets

SAFETY

- 62 Radiator cover
- 64 Finger alert
- 65 Safe profiles
- 66 **PVC** wall protection
- 67 Wall protection with LED
- Handrail, shock-absorbing buffer and lining strips 68

CUSTOM-MADE

- 73 Custom – made production
- 77 Displays units



















RECYCLABLE MATERIALS


Quality is the essence of competitiveness, environmental sustainability its excellence. All the production scraps are reused and incorporated into the production cycle.





AN ECO-FRIENDLY PRODUCTION

Always attentive to the green engineering, we employ photovoltaic installations in order to realize a self-sufficient production, with a low energy consumption.





A WHOLLY ITALIAN PRODUCTION

Trafilplast products born in Osasio (Turin) from an all italian production of the highest quality.





Home improvement and technical profiles

Standard, aluminium, stone, wood, embossed effects

expanded pvc



White (1) expanded PVC painting with wall paints

expanded pvc colors: **Standard**



expanded pvc colors: **WOOC**





expanded pvc colors: embossed




expanded pvc colors: dignified colors



expanded pvc colors: Square e round



flexible pvc profiles flexible pvc colors: standard

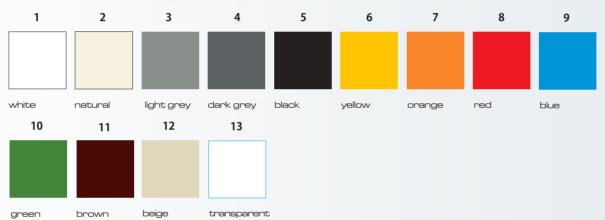

rigid pvc profiles rigid pvc colors: standard



High and certified fire protection

The passive fire protection increasingly needs complete, safe and certified solutions.

All our finished products are strictly tested and complemented by certifications required by the regulations in terms of fire safety.

Certifications of fire resistance are available on request.

Material suitable for use in hospital structures, assistance structures and sanitary structures in general, as well as in environments where foodstuffs is being processed.

Our plastic material is entirely waterproof, smooth, washable and sterilizable. It doesn't release chemical substances under normal conditions of use and it is not affected by the use of traditional cleaners and degreasers.

Strips

Finishing Profiles





Quarter Circular Finishing profile







FINISHING PROFILE

Quarter circular Flexible PVC 15x15 mm

Pack: 50 meters | 2 meters bars
Minimum order: 500 meters (for colors out of stock)

15 Use: finishing profile

Code: M35







FINISHING PROFILE


Quarter circular Flexible PVC 10x10 mm


Pack: 50 meters | 2 meters bars Minimum order: 500 meters (for colors out of stock)

Use: finishing profile

Code: M36





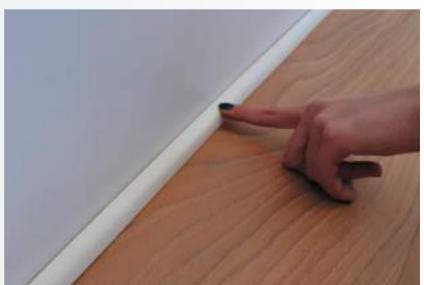




Flexible pvc corner cover

Corner Cover



FLEXIBLE PVC CORNER COVER

25x25 mm | thickness 1.5 mm Pack: 40 meters | 10 meters roll Minimum order (for colors out of stock): 1000 meters Use: protection and finishing of the corners Fits for all surfaces Code M42

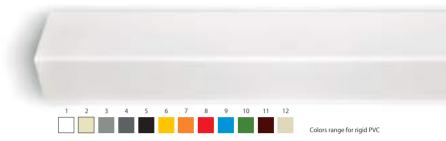











FLEXIBLE PVC CORNER COVER

44x44 mm | thickness 3,5 mm Pack: 60 meters | 2 meters bars Minimum order (for colors out of stock): 300 meters Use: protection and finishing of the corners, fits for all surfaces. Suitable for all angles. Code: M49











FLEXIBLE PVC CORNER COVER

47x47 mm | thickness 3,5 mm Pack: 60 meters | 2 meters bars Minimum order: 300 meters Use: protection and finishing of the corners, fits for all surfaces. Suitable for all angles.

Flexible pvc corner cover NEW Colors range for rigid PVC



Suitable for 1,5 mm thickness Code: M50



Suitable for 2 mm thickness Code: M51





shock resistant Corner Cover

HIGH-PERFORMANCE FLEXIBLE

SHOCK RESISTANT CORNER COVER

Flexible PVC wall protection corner cover 35x35 mm Thickness 3 mm | 2 meters bars Pack: 50 meters Use: tube and rounded angle are effective corner

protections Recommended applications: schools, kindergartens, hospitals, public places and wherever it is necessary

to prevent work injuries

Code M12



ACCESSORY

cap

for shock resistant corner cover

Semitransparent PVC Code cap M12T

shock resistant Corner cover

SHOCK RESISTANT









VERSATILE

FLEXIBLE

SHOCK RESISTANT CORNER COVER

Flexible PVC wall protection corner cover 25x25 mm | Thickness 1 mm | 2 meters bars

Pack: 50 meters

Use: tube and rounded angle

are effective corner protections

Recommended applications: schools, kindergartens, hospitals, public places and wherever it is necessary

to prevent work injuries

Code AV02PVC














Ø Ø Ø Ø ○ ○ ○ Standard corner cover



Inside PVC corner cover 17x17 mm | thickness 3.5 mm Pack: 180 meters | 3 meters bars Minimun order (for colors out of stock): 1080 meters Use: finishing profile **Code Z6**

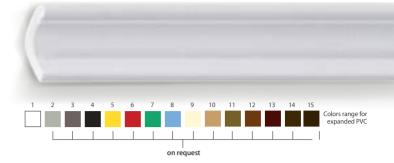


baroque corner cover



BAROQUE CORNER COVER

PVC corner cover 22x22 mm | thickness 2.5 mm Pack: 180 meters | 3 meters bars Minimum order (for colors out of stock): 1080 meters Use: protection and finishing profile

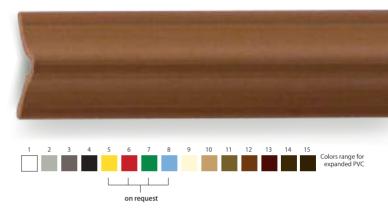

standard corner cover














STANDARD CORNER COVER Rigid PVC 50x50 mm | thickness 3 mm Pack: 30 meters | 3 meters bars Stock item: only White (2) Use: protection profile Code R10









Corner cover

Finishing and protection Profiles

standard corner cover







STANDARD CORNER COVER

Smooth PVC corner cover 24x24 mm | thickness 2.5 mm Pack: 180 meters | 3 meters bars Minimum order (for colors out of stock): 1080 meters Code Z2

Smooth PVC corner cover 30x30 mm | thickness 3.5 mm Pack: 150 meters | 3 meters bars Minimum order (for colors out of stock): 1080 meters Code Z8

Smooth PVC corner cover 50x50 mm | thickness 3 mm Pack: 90 meters | 3 meters bars Minimum order (for colors out of stock): 1080 meters Code Z15


Smooth PVC corner 20x20 mm | thickness 2,8 mm Pack: 180 meters | 3 meters bars Minimum order (for colors out of stock): 1080 meters Code: Z19

Use: protection and finishing profile






Home improvement and technical profiles







aluminiun, stone corner cover



Smooth PVC corner cover 24x24 mm thickness 2.5 mm Pack: 180 meters | 3 meters bars Code N6 Smooth PVC corner cover 30x30 mm thickness 3.5 mm Pack: 150 meters | 3 meters bars Code N4 Use: protection and finishing profile




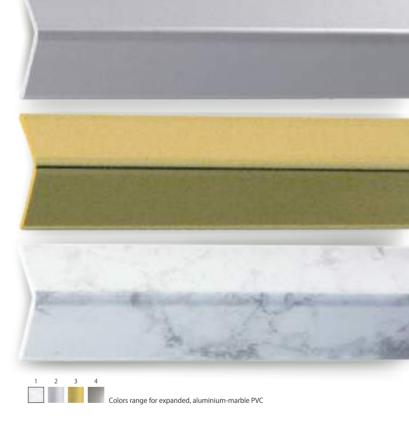



EMBOSSED CORNER COVER
Smooth PVC corner cover 24x24 mm
thickness 2.5 mm
Pack: 180 meters | 3 meters bars
Code G2
Smooth PVC corner cover 30x30 mm
thickness 3.5 mm
Pack: 150 meters | 3 meters bars
Code G8
Use: protection and finishing profile



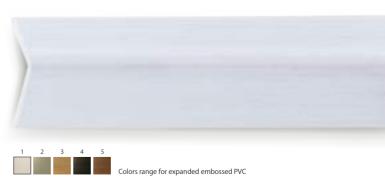

embossed corner cover

Skirting boards Protection and finishing profiles



aluminium, stone skirting board





HIGH PERFORMANCE

ALUMINIUM, STONE SKIRTING BOARD PVC Skirting board 70 Height 70 mm | width base 7 mm | thickness 2 mm Pack: 200 meters | 2 meters bars

Use: skirting board Code N3





wood skirting board




2





ALUMINIUM, STONE SKIRTING BOARD PVC Skirting board 70 8 Height 70 mm | width base 7 mm | thickness 2 mm Pack: 200 meters | 2 meters bars Use: skirting board

Code N3






























embossed skirting board



EMBOSSED SKIRTING BOARD

PVC Skirting board 70 Height 70 mm | width base 7 mm | thickness 2 mm Pack: 200 meters | 2 meters bars Use: skirting board Code G7






standard skirting board





standard skirting board





standard skirting board







HIGH PERFORMANCE

SKIRTING BOARD

Expanded PVC skirting board Height 60 mm | width 10 mm | Thickness 2,6 mm | 2 meters bars

Pack: 100 meters

Minimum order (for colors out of stock): 800 meters

Use: skirting board Code: Z18

























HIGH PERFORMANCE

SKIRTING BOARD

Expanded PVC skirting board Height 70 mm | width 15 mm | Thickness 2,7 mm | 2 meters bars

Pack: 100 meters

Minimum order (for colors out of stock): 800 meters

Use: shelled skirting board

Ideal to connect the wall with the floor.

Code: Z17















Material suitable for use in hospital structures, assistance structures and sanitary structures in general, as well as in environments where foodstuffs is being processed.

Our plastic material is entirely waterproof, smooth, washable and sterilizable. It doesn't release chemical substances under normal conditions of use and it is not affected by the use of traditional cleaners and degreasers.













SHELLED SKIRTING BOARD

Expanded shelled PVC skirting board Height 80 mm | width 14 mm | Thickness 2,7 mm | 2 meters bars

Pack: 100 meters

Minimum order (for colors out of stock): 800 meters

Use: shelled skirting board

Ideal to connect the wall with the floor.

Code: Z16

















Material suitable for use in hospital structures, assistance

structures and sanitary structures in general, as well as in environments where foodstuffs is being processed.

Our plastic material is entirely waterproof, smooth, washable and sterilizable. It doesn't release chemical substances under normal conditions of use and it is not affected by the use of traditional cleaners and degreasers.

Home improvement and technical profiles



Multisystem skirting board

Multisystem protection and finishing profiles

standard Multisystem





MULTIFUNCTIONAL

HIGH PERFORMANCE

MULTISYSTEM SKIRTING BOARD

PVC Multisystem skirting board Height 70 mm | width base 12 mm | thickness 3mm Pack: 50 meters | 2 meters bars Use: cable feed-through base. It can be used also on pre-finished floors thanks to its base width. Application informations: 1) with special clips

2) with special glue for PVC

Code 713







HIGH-PERFORMANCE

MULTISYSTEM SKIRTING BOARD

PVC Multisystem skirting board Height 70 mm | width base 12 mm | thickness 3mm Pack: 50 meters | 2 meters bars Use: cable feed-through base. It can be used also on pre-finished floors thanks to its base width. Application informations:

1) with special clips

2) with special glue for PVC

Code G13

Colors range for expanded PVC


















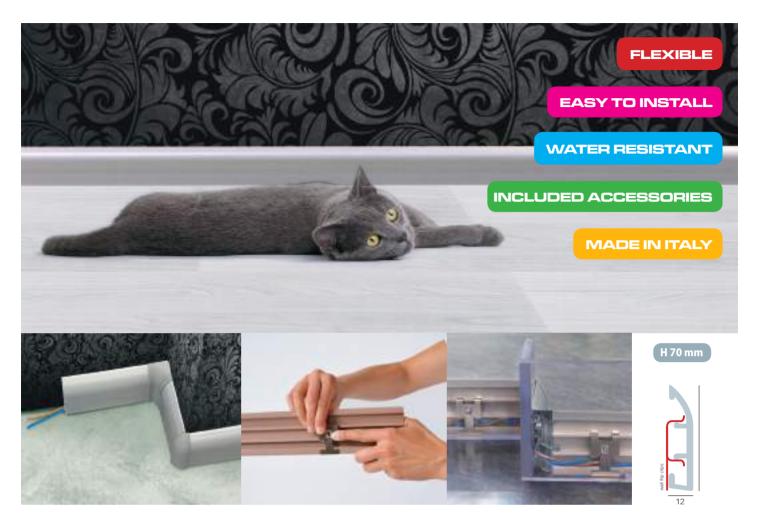

Accessories for Multisystem

Multisystem fastening





FASTENING WITH CLIPS

Pack: pack of 20 and 100 pieces Use: fastening system cable feed-through base Code PC20 Pack: 20 pieces Code PC100 Pack: 100 pieces

Multisystem **joints**



JOINT PG10, PG100
EXTERNAL ANGLE PAE10, PAE100
INTERNAL ANGLE PAI10, PAI100
RIGHT TERMINAL PTDX10, PTDX100
LEFT TERMINAL PTSX10, PTSX100
Pack:10, 100 pieces

ACCESSORIES

KIT MULTISYSTEM ACCESSORIES

10 pieces pack contains:

- 1 right terminal
- 1 left terminal
- 4 internal angles
- 2 external angles
- 2 joints Code PCA

Multi-purpose **adhesive**



ACCESSORY


ADHESIVE FOR EXPANDED PVC

Multi-purpose thixotropic adhesive paste Pack: 310 ml Use: fastening system cable feed-through base

Code TAK02

Multifunction skirting board

Multifunction protection profiles

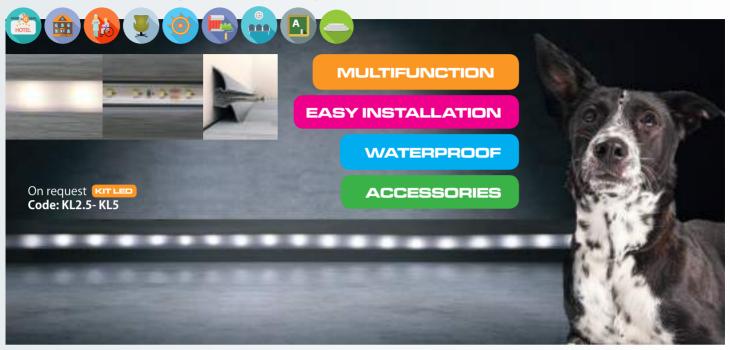

Multifunction classic | metal | wood







MULTIFUNCTION CLASSIC | METAL | WOOD PVC Multi-function skirting board High: 55 mm | base width: 26 mm Thickness: 1 mm Pack: 50 meters | 2,5 meters bar Use: trough cable skirting board. It can be used also on pre-finished floors thanks to its base width. Code: MF55

26 mm

47 liverpool oak























19 dark walnut



oak sardinia





107 black



Colors range for PVC

Multifunction accessories

Multifunction joints

ACCESSORIES













KIT MULTIFUNCTION **ACCESSORIES**

10 pieces pack contains: 1 right terminal; 1 left terminal; 4 internal angles 2 external angles; 2 joints Code: MFA



Colors range for PVC

Skirting board and cover skirting



BAROQUE SKIRTING BOARD

PS Skirting Board Height 90 mm | Base width 15 mm Pack: 12 pieces | 2,4 meters bars Use: skirting board. It is specifically recommended for DIY installation thanks to its quick and easy application Code: PS1






SHOCKPROOF

SKIRTING COVER SKIRTING

PS Skirting Board Height 95 mm | Base width 19 mm | Thickness 5 mm Pack: 10 pieces | 2,4 meters bars Use: skirting board recommended for th covering of previous skirting board. It is possible to cut it to the required height. Code: PS2



skirting cover skirting









Square skirting board Protection and finishing profiles














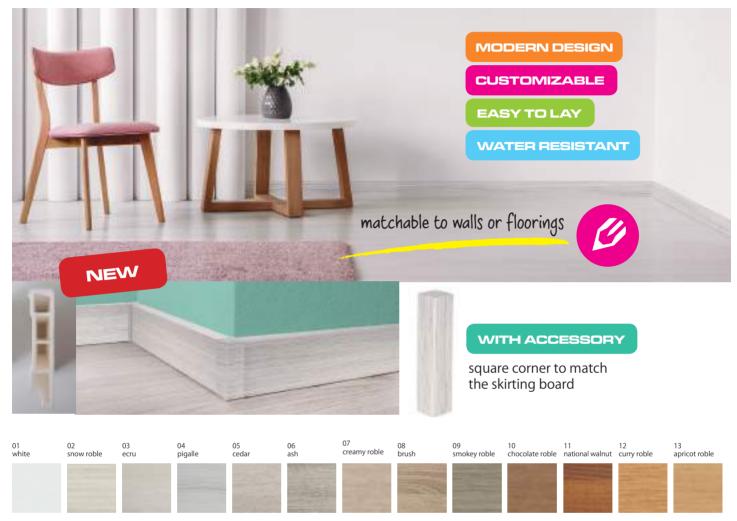

Colors range for SOUARE e ROUND

SQUARE skirting board













SQUARE SKIRTING BOARD

PVC Skirting board 70 Height 70 mm | Base width 14 mm Thickness 2 mm Use: skirting board. It can be used as flush-wall skirting board for plasterboard walls.

Pack: 50 meters | 2,5 meters bars

Code: P1



EXPANDED PVC FEATURES: Expanded PVC is light, flexible, water and moisture resistant.












Round skirting board Protection and finishing profiles

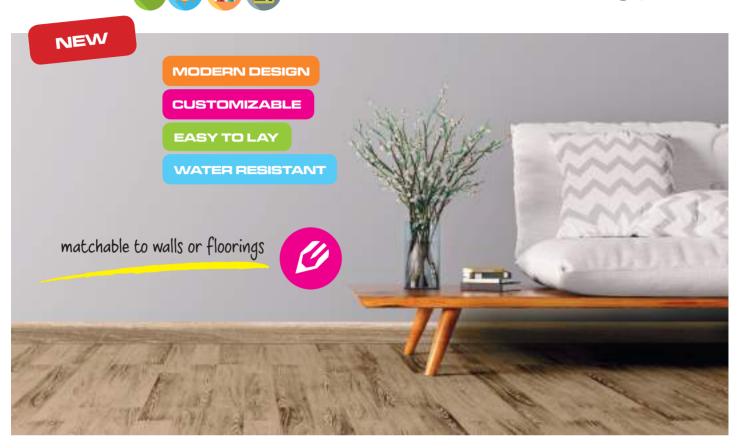




Colors range for SQUARE e ROUND

round skirting board



ROUND SKIRTING BOARD
PVC Skirting board 70
Height 70 mm | Base width 12 mm
Thickness 2 mm
Use: skirting board
Pack: 50 meters | 2,5 meters bars
Code: P2





EXPANDED PVC FEATURES: Expanded PVC is light, flexible, water and moisture resistant.



Flexible Skirting Boards

Protection and finishing profiles



















It is recommended





standard skirting board



9













HIGH-PERFORMANCE

STANDARD SKIRTING BOARD

Flexible PVC Skirting board Height 60 mm | width 12.5 mm | thickness 1.5 mm Use: skirting board

Code M6: 50 meters rolls | Pack: 100 meters Code M6-10: 10 meters rolls | Pack: 40 meters 10 meters rolls are available in the following colours:



standard skirting board









75

12.5









10 mt 50 mt

HIGH-PERFORMANCE

STANDARD SKIRTING BOARD

Flexible PVC Skirting board Height 75 mm | width 15 mm | thickness 1.8 mm Use: skirting board

Code M1: 50 meters rolls | Pack: 100 meters Code M1-10: 10 meters rolls | Pack: 40 meters 10 meters rolls are available in the following colours:

















HIGH-PERFORMANCE


STANDARD SKIRTING BOARD

Flexible PVC Skirting board Height 80 mm | width 15 mm | thickness 2 mm Pack: 100 meters | 50 meters rolls Use: skirting board


Code M7

2 3 4 5 6 7 8 9 10 11 12 colors range for flexible PVC



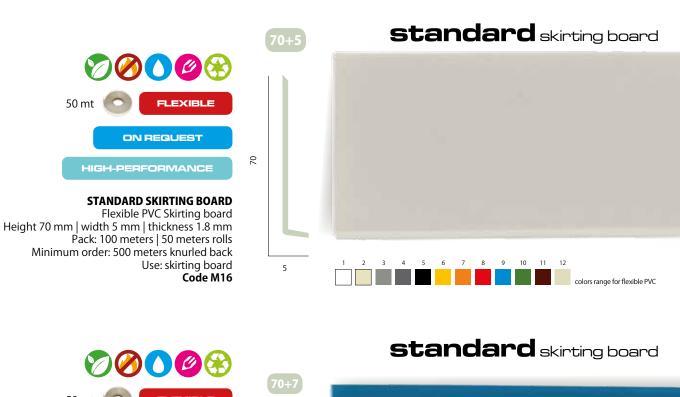



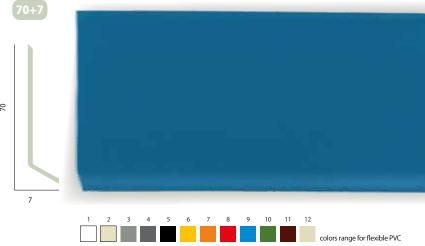



Flexible PVC skirting board, Knurled back
Height 80 mm | width 7.5 mm | thickness 2 mm
Pack: 100 meters | 50 meters rolls
Minimum order: 500 meters
Use: skirting board
Code: M52





ON REQUEST HIGH-PERFORMANCE **STANDARD SKIRTING BOARD** Flexible PVC Skirting board Height 90 mm | width 7 mm | thickness 1.8 mm 50 meters rolls Minimum order: 500 meters knurled back Use: skirting board

Code M17

7

100

standard skirting board NEW



50 mt HIGH-PERFORMANCE **STANDARD SKIRTING BOARD** Flexible PVC skirting board, Knurled back Height 100 mm | width 10 mm | thickness 2 mm

Pack: 100 meters | 50 meters rolls Minimum order: 500 meters **Use**: skirting board Code: M53

standard skirting board




FLEXIBLE 50 m **ON REQUEST STANDARD SKIRTING BOARD** Flexible PVC skirting board 110 Knurled back

Height 110 mm | width 7 mm | thickness 1.8 mm 50 meters rolls Minimum order: 500 meters Use: skirting board Code M18

Home improvement and technical profiles





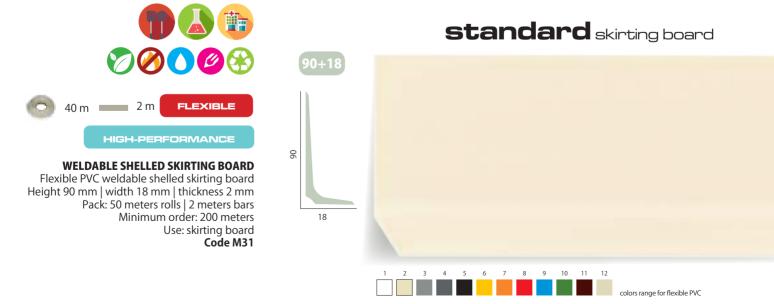

standard skirting board







25 m ____ 2 m

HIGH-PERFORMANCE

WELDABLE SHELLED SKIRTING BOARD

Flexible PVC weldable shelled skirting board Knurled back Height 90 mm | width 45 mm | thickness 3 mm 2 meters bars | 25 meters rolls Minimum order: 200 meters Use: skirting board Code M21

standard skirting board





HIGH-PERFORMANCE

SHELLED SKIRTING BOARD

Flexible PVC skirting board, weldable shelled Zero finish for direct floor installation Height 100 mm | width 15 mm | thickness 2,5 mm 2 meters bars

Pack: 50 meters Minimum order: 200 meters Use: shelled skirting board

Ideal to connect the wall with the floor.

Code: M54

standard skirting board





HIGH-PERFORMANCE

SHELLED SKIRTING BOARD

Flexible PVC skirting board weldable shelled

Knurled back Height 100 mm | width 20 mm | thickness 2,5 mm 2 meters bars Pack: 50 meters

Minimum order: 200 meters Use: shelled skirting board

Ideal to connect the wall with the floor.

Code: M55

standard skirting board 40 m 2 m HIGH-PERFORMANCE **WELDABLE SHELLED SKIRTING BOARD** 97 Flexible PVC weldable shelled skirting board Knurled back Height 97 mm | width 18 mm | thickness 2 mm 40 meters rolls | 2 meters bars Minimum order: 200 meters 18 Use: skirting board Code M26 colors range for flexible PVC standard skirting board **FLEXIBLE** ON REQUEST 8 HIGH-PERFORMANCE **WELDABLE SHELLED SKIRTING BOARD** Flexible PVC weldable shelled skirting board Zero finish for installation directly on floor Knurled back 30 Height 100 mm | width 30 mm | thickness 3 mm Minimum order: 200 meters | 2 meters bars Use: skirting board Code M20 standard skirting board NEW FLEXIBLE HIGH-PERFORMANCE **SHELLED SKIRTING BOARD** Flexible PVC skirting board weldable shelled Height 100 mm | width 50 mm | thickness 2,5 mm Pack: 50 meters | 2 meters bars Minimum order: 200 meters Use: shelled skirting board Ideal to connect the wall with the floor. Code: M58

colors range for flexible PVC

standard skirting board





FLEXIBLE

HIGH PERFORMANCE

SHELLED SKIRTING BOARD

Flexible PVC skirting board weldable shelled Height 100 mm | width 55 mm | thickness 2,5 mm Pack: 50 meters | 2 meters bars Minimum order: 200 meters Use: shelled skirting board Ideal to connect the wall with the floor.

Code: M56



100 40













WELDABLE SHELLED SKIRTING BOARD

Flexible PVC weldable shelled skirting board Height 100 mm | width 40 mm | Thickness 3 mm Pack: 2 meters bars Knurled back Minimum order: 200 meters Use: skirting board

Code M39



subfloor



















HIGH PERFORMANCE

SUBFLOOR

Flexible PVC subfloor Height 95 mm | width 30 mm Thickness 2 mm Internal portion from 3 to 5 mm Pack: 50 meters | 2 meters bars Knurled back Minimum order: 200 meters Use: shelled subfloor

Code M29-3 Code M29-4

Code M29-5

















It is recommended




to use a double-spread glue for flexible PVC



keep warm ($\simeq 18^{\circ}$ C) 24 hours before using

The special consistency and flexibility of the material make it suitable for all surfaces. It is easy to cut and place.

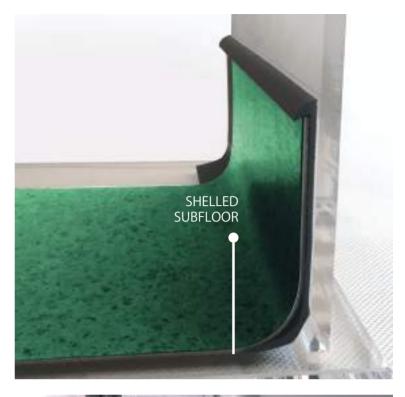









Scotia

Sanitary PVC scotia between two walls or between floor and wall













Material suitable for use in hospital structures, assistance structures and sanitary structures in general, as well as in environments where foodstuffs is being processed.

Our plastic material is entirely waterproof, smooth, washable and sterilizable. It doesn't release chemical substances under normal conditions of use and it is not affected by the use of traditional cleaners and degreasers.

PVC **scotia**















PVC SCOTIA

Flexible PVC scotia 15x15 mm | 2 meters bars Minimum order: (for colors out of stock) 500 meters Pack: 100 meters Code M30



RECOMMENDED to seal shower box, sink, bathtube, etc.

PVC **scotia**





















PVC SCOTIA

Flexible PVC scotia 20x20 mm Pack: 100 meters Minimum order: (for colors out of stock) 500 meters Code M10 2 meters bars Code M10-10 10 meters rolls





















Flexible PVC scotia 32x32 mm | 2 meters bars Minimum order: (for colors out of stock) 500 meters Pack: 80 meters Code M8

PVC **scotia**

FLEXIBLE



20 m





VERSATILE









PVC SCOTIA

Flexible PVC scotia 35x35 mm | 2 meters bars Minimum order: (for colors out of stock) 500 meters Pack: 80 meters | 20 meters rolls Code M3

Home improvement and technical profiles



Protection profiles

stair nosing profile



HIGH PERFORMANCE











STAIR NOSING PROFILE

Flexible PVC stair nosing profile Width 60 mm | Height 40 mm | Thickness 4 mm | 2 meters bars Pack: 60 meters Minimum order: 240 meters

Use: non-slip and step protection

Code: M57



stair nosing profile



HIGH PERFORMANCE











FLEXIBLE


STAIR NOSING PROFILE

Flexible PVC stair nosing profile 2 meters bars | Pack: 50 meters Minimum order: 200 meters Use: non-slip and step protection

Width 58 mm | Height 37 mm Thickness 5mm Suitable for 2 mm thick floor Code: M48-2

Width 57 mm | Height 39 mm Thickness 5 mm Suitable for 3 mm thick floor Code: M48-3

Width 55 mm | Height 35mm Thickness 5 mm Suitable for 4 mm thick floor Code: M48-4

















HIGH PERFORMANCE


FLEXIBLE

11,7

STAIR NOSING PROFILE

Flexible PVC Stair nosing profile Width 44 mm | height 35 mm 2 meters bars Pack: 60 meters Minimum order (for colors out of stock): 540 meters Use: non-slip and step protection Code M40

stair nosing profile

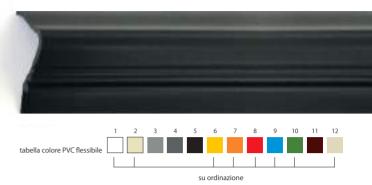











40



FLEXIBLE

STAIR NOSING PROFILE

Flexible PVC Stair nosing profile Width 60 mm | height 40 mm 2 meters bars Pack: 60 meters Minimum order (for colors out of stock): 500 meters Use: non-slip and step protection Code M41

stair nosing profile









40

HIGH PERFORMANCE







STAIR NOSING PROFILE


Flexible PVC Stair nosing profile Width 55 mm | height 40 mm 10 and 30 meters rolls | 2 meters bars Pack: 60 meters Minimum order (for colors out of stock): 500 meters Use: non-slip and step protection

Code M2 Code M2-10

stair nosing profile









stair nosing profile





FLEXIBLE

HIGH PERFORMANCE

STAIR NOSING PROFILE

Flexible PVC stair nosing curved profile Width 63 mm | Height 57 mm | Thickness 3,8 mm | 2 meters bars Pack: 50 meters Minimum order: 200 meters

(for colors out of stock) Use: non-slip and step protection

Code: M47



stair nosing profile





HIGH PERFORMANCE


STAIR NOSING PROFILE

Flexible PVC stair nosing curved profile 2 meters bars | Pack: 50 meters Minimum order: 200 meters Use: non-slip and step protection

Width 63 mm | Height 55 mm Thickness 3,5 mm Suitable for 2 mm thick floor Code: M59-2

Width 63 mm | Height 55 mm Thickness 4 mm Suitable for 3 mm thick floor Code: M59-3

Width 63 mm | Height 55mm Thickness 5 mm Suitable for 4 mm thick floor Code: M59-4










Flooring profile

Flooring profile





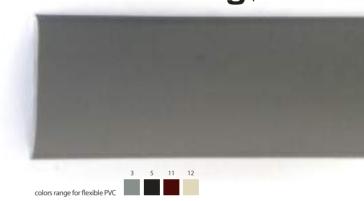

HIGH-PERFORMANCE

FLEXIBLE



FLOORING PROFILE


Flexible PVC flooring profile 43 mm Thickness 4 mm | 900 mm bars | Pack: 10 pieces Minimum order: 450 meters Use: ideal for two different flooring Code: M43



Flexible PVC flooring profile 40 mm Thickness 3 mm | 900 mm bars | Pack: 10 pieces Minimum order: 540 meters Use: ideal for two different flooring

46

Code: M44

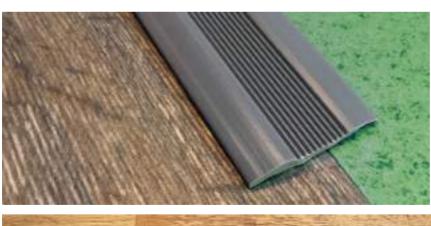





Connector profile

connector profile





HIGH-PERFORMANCE


FLEXIBLE


connector profile






connector profile

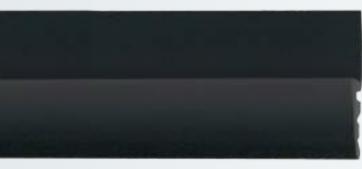



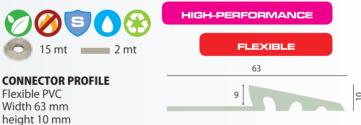


Pack: 45 meters | 15 meters rolls | 40 meters | 2 meters bars Minimum order (for colors out of stock): 500 meters Stock item: black color Use: connection for doormats and floors

Code M9R Rolls Code M9B Bars









Sanitary connectors



Finishing profiles for tiles



10

SANITARY CONNECTOR

Rigid PVC Sanitary connector Height 8 mm | length 2.70 meters Pack: 108 meters

Code RI 1

Height 10 mm | length 2.70 meters Pack: 108 meters

Code RI 2

Use: connector for internal corner, fit for joining walls to the bathtube or to shower tray

SANITARY CONNECTOR

Rigid PVC Sanitary connector

Height 8 mm | length 2.50 meters | Pack: 50 meters

Code RI 3

Height 10 mm | length 2.50 meters | Pack: 50 meters Code RI 4

Height 12.5 mm | length 2.50 meters | Pack: 50 meters

Code RI 5 Use: sanitary connector between walls or wall and floor,

fit for public places

INTERNAL CORNER

For items RI3, RI4, RI5 Pack: 30 pieces

Use: internal corner for sanitary connector Code RI 6

EXTERNAL CORNER

For items RI3, RI4, RI5 Pack: 30 pieces Use: external corner for sanitary connector

Code RI 7



IOINT

Elastic joint for glue laying height 8x8 mm length 2.50 meters | height useful 7 mm | Pack: 100 meters | Code RG1

Elastic joint for glue laying height 10x8 mm length 2.50 meters | height useful 9 mm | Pack: 100 meters | Code RG2

Elastic joint for glue laying height 12x8 mm

length 2.50 meters | height useful 11 mm | Pack: 100 meters | Code RG3

Elastic joint for glue laying height 14x8 mm length 2.50 meters | height useful 13 mm | Pack: 100 meters | **Code RG4**

Use: expansion joint for glue laying. Its purpose is to compensate the movements caused by floor expansion.

FINISHING









PVC cove formers


















For floor expansion

PVC joints



Colors availables:

Outside a. beige – Inside a. beige. Outside light grey - Inside light grey. Outside light grey – Inside transparent. Outside dark grey – Inside transparent.



rigid pvc triangular chamfer strip

RIGID PVC TRIANGULAR CHAMFER STRIP

23X32 mm | Width 23 mm | 2 meters bars Pack: 140 meters | Minimum order: 980 meters Code: R11

15X20 mm | Width 15 mm | 2 meters bars Pack: 200 meters | Minimum order: 1000 meters Code: R12

Use: Concrete finishing profile



Tubes



Accessories for tubes





Diameter 50 mm | Pack: 4 pieces Minimum order: 20 packs

Code: TAPPO50

Diameter 32 mm | Pack: 4 pieces Minimum order: 20 packs







HIGH-PERFORMANCE

ROLLING SHUTTER BELT

Flexible PVC rolling shutter belt reinforced with polyester threads Height 21,5 mm | Thickness 2,2 mm 50 meters roll Pack: 100 meters Minimum order: 3000 meters (for colors out of stock) Use: rolling shutter belt Code: FP1

21,5 2.2

Rolling shutter belt





90 mt



Reinforced profile




Colors range for flexible PVC

HIGH-PERFORMANCE

REINFORCED PROFILE Flexible PVC profile reinforced with polyester threads Width 39 mm | Thickness 1,5 mm 90 meters roll without holes PRODUCT ON REQUEST Use: various

Code: FP2









HIGH-PERFORMANCE

PVC SHEATH

Diameter 40 mm PRODUCT ON REQUEST Use: various

Code: D14











HIGH-PERFORMANCE

FLEXIBLE PVC TUBE


Outer circumference 23 mm Inner circumference 19 mm Thickness 2 mm PRODUCT ON REQUEST Use: various Code: D11



Colors for jolly items and strips for ceramics



marbled colors

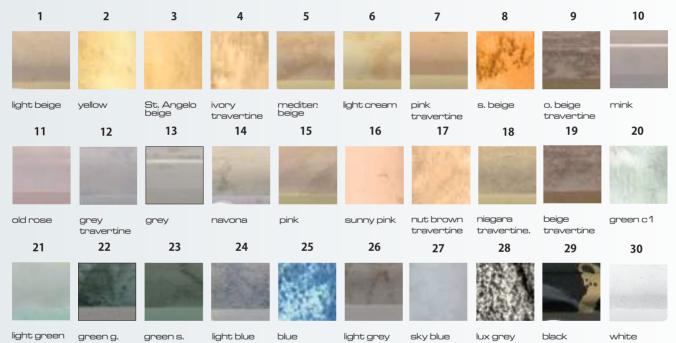

Profiles

for ceramic coverings



marbled colors jolly profiles















JOLLY PROFILE

Rigid PVC Jolly profile Height 6 mm | length 2.70 meters Pack: 135 meters Code J 6

JOLLY PROFILE

Rigid PVC Jolly profile Height 8 mm | length 2.70 meters Pack: 135 meters Code J 8

JOLLY PROFILE

Rigid PVC Jolly profile Height 10 mm | length 2.70 meters Pack: 135 meters Code J 10

JOLLY PROFILE

Rigid PVC Jolly profile Height 12.5 mm | length 2.70 meters Pack: 135 meters Code J 12.5

JOLLY TOP PROFILE

Rigid PVC Jolly Top profile Height: 8 mm Pack: 50 pieces Colour: white

JOLLY TOP PROFILE

Rigid PVC Jolly Top profile Height: 10 mm Pack: 50 pieces Colour: white Code JT 10





VERSATILE

STRIP FOR CERAMICS

Rigid PVC Strip for ceramics Height 8 mm or 10 mm | length 2,70 meters Pack: 67,5 meters Use: finishing profile for paneling. These elements protect the terminal parts of the tiles and make them more resistant. Use the same adhesive employed to place the ceramic. Always choose a profile with the same thickness of the tile. Code L8 - L10





VERSATILE











pastel colors / marbled colors

strip for ceramics








Wall guard


Protection and wall finishing

transparent wall guard smoke-grey wall guard

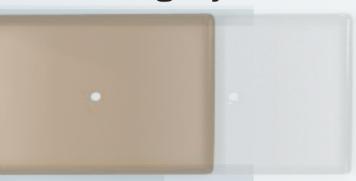

white wall guard ivory wall guard





WALL GUARD 500X80

Height 80 mm | length 500 mm | thickness 4 mm Pack: 50 pieces

Code 1B1 transparent, 1B2 white, 1B3 smoke-grey, 1B4 ivory Code 1B1B transparent, packed separately with bar code.

WALL GUARD 800X80

Height 80 mm | length 800 mm | thickness 4 mm Pack: 50 pieces

Code 1BS1 transparent, 1BS2 white, 1BS3 smoke-grey, 1BS4 ivory Code 1BS1B transparent, packed separately with bar code.

The application is extremely simple: just drill a hole of Ø 5 mm. Put the screw anchor (supplied with the assembly kit) in the hole, carefully remove any dust from the wall using a cloth and finally apply the wall guard using its screws. The assembly kit is included in the package (screws and screws anchors).







transparent wall guard





WALLGUARD 1000X100

Height 100 mm | lenght 1000 mm Thickness 2 mm Pack: 50 pieces

Code 1BS10 transparent

WALLGUARD 1000X200

Height 200 mm | lenght 1000 mm | Thickness 2 mm Pack: 50 pieces Code 1BS20 transparent

Use:

Wall guard are particularly suitable for use in homes, offices, waiting rooms and wherever walls are particularly exposed to possible damages. The transparent version is suitable for any type of forniture.

Home improvement and technical profiles









MAGIC TRANSPARENT





custom-made

decorations

Use:

Light switch finger plates are particularly suitable for use in homes, offices, waiting rooms and crowded public places. The transparent version is suitable for any type of forniture. The application is extremely simple: just put the light switch finger plate between the wall and the light switch cover without using glue or other fixing agents.









1L8 TRANSPARENT







1L1 TRANSPARENT

Protection of wall

Ligth switch finger plates magic model

MODEL MAGIC Height 145 mm | width 180 mm | thickness 3 mm Pack: 100 Pieces

Code 1L8 transparent, 1L9 ivory, 1L10 white, 1L11 smoke-grey, 1L12 fluorescent



Ligth switch finger plates

lux model

LUX MODEL

Height 145 mm | width 180 mm | thickness 3 mm Pack: 100 Pieces

Code 1L1 transparent, 1L2 ivory, 1L3 white, 1L4 smoke-grey, 1L5 fluorescent



Polycarbonate

Transparency, thermal insulation and resistance

The polycarbonate is a techno-polymer with excellent features of transparency, thermal insulation and crash resistance. The particular multiwall structure of the sheets optimizes all these features and makes it suitable in residential and industrial building applications. The external side of Polycarbonate is coated with U.V. protection warranting resistance to aging due to atmospheric agents and UV rays.

Crystal multiwall polycarbonate sheets



MULTIWALL POLYCARBONATE SHEET


Technical features: linear thermal expansion: 0,065 mm/m°C

Temperature range: from -40 °C to +120 °C U.V. Protection, fire reaction EuroClass Bs 1 d0 Use: roofing, windows, skylights, greenhouses, porches, gazebos, ceilings.

Drilling: the sheets can be drilled by means of standard helical bits for metal. Holes have to be distant at least 40 mm from the panel's edges; the diameters of the hole must be larger than its anchoring system in order to allow the natural expansion of the material. Consider the termal expansion when installing (0.065 mm/m °C). **Cutting:** use an alternative hacksaw, a band or a circular

Handling: avoid exposure to direct sunlight and rain to prevent any excessive build-up of heat in the packaging or the formation of condensation in the cells.

saw, with a fine-tooth blade or a cemented carbide



Pack: 12 pcs

ACCESSORIES

Pack: 12 pcs

Accessories for placing are available and they make the products suitable for any situation:

Pack: 12 pcs

"H" PROFILE in polycarbonate, for lateral coupling "U" PROFILE in polycarbonate, for the closing of the alveoli **STELLONE**, Universal washer in transparent polycarbonate **TIP TAP,** closing profile for the alveoli

STELLONE

Pack: 10 pcs Code: B\M\ STEL\T



Pack: 10 pcs 250 mm thickness 6 mm Code: B/M/TIP/6/T

Pack: 12 pcs

Pack: 10 pcs 250 mm thickness 10 mm Code: B/M/TIP/10/T





Pack: 50 pcs 2,1 meters bars | 6 mm Code: B\1158 2,1 meters bars | 10 mm Code B\1160

2,1 meters bars | 16 mm Code B\1161

"H" PROFILE



Pack: 25 pcs 2 meters bars | 6 mm Code: B\1162A 2 meters bars | 10 mm Code: B\1164A

2 meters bars | 16 mm Code: B\1165A

Safe crystal Self-extinguishing, light and safe

Solid Polycarbonate sheets have excellent mechanical, thermal and electrical properties. They are flexible and shock resistant, they provide a higher thermal and acoustic insulation than common glass. The lightness (A solid polycarbonate sheet weighs 50% less than a sheet of glass of the same thickness) allows to reduce the weight in building applications. The advantages of solid polycarbonate sheets are: self-extinguishing, safety, lightness, light transmission, U.V. protection.



MULTIFUNCTIONAL

ULTRA-LIGHT

SOLID POLYCARBONATE SHEET

Sheet 500x1000 | thickness 2-3-4-5 mm Pack: 12 pcs

Code LCP2C500X1000

Sheet 1000x1000 | thickness 2-3-4-5 mm Pack: 6 pcs

Code LCP2C1000X1000

Sheet 1000x1500 | thickness 2-3-4-5 mm Pack: 4 pcs

Code LCP2C1000X1500

Sheet 1000x2000 | thickness 2-3-4-5 mm Pack: 3 pcs

Code LCP2C1000X2000

Sheet 2000x3000 | thickness 2-3-4-5 mm Pack: 1 pcs

Code LCP2C2000X3000

Technical features:

linear thermal expansion: 0,065 mm/m °C

Temperature range: from - 40°C to +120 °C

U.V. Protection, fire reaction EuroClass Bs 1 d0.

Colors available on request: opal and bronze.

Use: roofing, windows, skylights, greenhouses, porches,

gazebos, ceilings.

Installation: solid polycarbonate sheets can be installed in most PVC, wood, steel and aluminium structures and frames.

The frame must hold the sheet in place

The frame must hold the sheet in place while allowing it to expand.

Drilling and cutting: the sheets can be drilled by means of

standard helical bits for metal. Holes have to be distant at least 40 mm from the panel's edges; the diameters of the hole must be larger than its anchoring system in order to allow the natural expansion of the material. Consider the thermal expansion when installing (0.065 mm/m °C). Use a saw with a blade specific for plastics or a circular saw with a cemented carbide blade.

Handling: Avoid exposure to direct sunlight and rain to prevent any excessive build-up of heat in the packaging. Cleaning: we recommend the use of water and neutral detergent only. Do not use abrasive products.

















Safe mirror

Unbreakable and reflective

Excellent optical, flexible and resistant properties



UNBREAKABLE













Colors available: transparent

Drilling and cutting: sheets can be drilled using standard drilling machines. Drill a hole of 1.5 mm diameters. It will be larger than the diameter of the screw in order to consider the sheet expansion. Install the sheet correctly in order to prevent breaks. Remove the protective film after cutting only. Use a saw with a blade specific for plastics or a circular saw with a cemented carbide blade. Avoid exposure to direct sunlight and rain to prevent any excessive build-up of heat in the packaging.

Cleaning: we recommend to use water and neutral detergent only. Do not use abrasive products. Dry gently using a soft cloth. Do not use alcohol.

Use: dressers, walls, ceiling, pillars ans floorings.



Sheet 500x500 mm | thickness 2 mm | Pack: 5 pcs Code LMC2S500X500

Sheet 500x1000 mm | thickness 2 mm | Pack: 5 pcs Code LMC2S500X1000

Sheet 1000x1000 mm | thickness 2 mm | Pack: 5 pcs Code LMC2S1000X1000

Sheet 1000x1500 mm | thickness 2 mm | Pack: 5 pcs Code LMC2S1000X1500

Sheet 1000x2000 mm | thickness 2 mm | Pack: 1 pcs Code LMC2S1000x2000

Multiuse sheets

Self-extinguishing, colored and safe

The expanded PVC sheets are light, resistant, easy to cut and apply. Easy to shape, clean and screen printing. These products are weather resistant and self-extinguishing.







ULTRA-LIGHT

MULTIFUNCTIONAL



custom-made

cut to size available on request

Multiuse sheets

EXPANDED PVC SHEET

Use: product can be used for creating dividers, coating, billboards, home improvement works, decorating panels Colors available: white, black, red, yellow, green, blue, grey

Cleaning: we recommend to use water and neutral detergent only. Do not use abrasive products.



colors range for multiuse sheets



Code	Description	Measure	ements mm	Thk. mm +	/-Min. Qty. pack
PVCB500X500	MULTIUSE WHITE SHEET	500	X 500	3	4
PVCB500X1000	MULTIUSE WHITE SHEET	500	X 1000	3	2
PVCB500X1500	MULTIUSE WHITE SHEET	500	X 1500	3	2
PVCB1000X1000	MULTIUSE WHITE SHEET	1000	X 1000	3	2
PVCB1000X1500	MULTIUSE WHITE SHEET	1000	X 1500	3	2
PVCB1000X1300 PVCB1000X2000	MULTIUSE WHITE SHEET	1000	X 2000	3	1
PVCDTUUUXZUUU	MOLITOSE WHITE SHEET	1000	Λ 2000	3	'
PVCG500X500	MULTIUSE YELLOW SHEET	500	X 500	3	4
PVCG500X1000	MULTIUSE YELLOW SHEET	500	X 1000	3	2
PVCG500X1500	MULTIUSE YELLOW SHEET	500	X 1500	3	2
PVCG1000X1000	MULTIUSE YELLOW SHEET	1000	X 1000	3	2
PVCG1000X1500	MULTIUSE YELLOW SHEET	1000	X 1500	3	2
PVCG1000X2000	MULTIUSE YELLOW SHEET	1000	X 2000	3	1
1 VCG1000/2000	MOLHOSE TELEOW SHEET	1000	Λ 2000	3	·
PVCR500X500	MULTIUSE RED SHEET	500	X 500	3	4
PVCR500X1000	MULTIUSE RED SHEET	500	X 1000	3	2
PVCR500X1500	MULTIUSE RED SHEET	500	X 1500	3	2
PVCR1000X1000	MULTIUSE RED SHEET	1000	X 1000	3	2
PVCR1000X1500	MULTIUSE RED SHEET	1000	X 1500	3	2
PVCR1000X2000	MULTIUSE RED SHEET	1000	X 2000	3	1
				_	
PVCV500X500	MULTIUSE GREEN SHEET	500	X 500	3	4
PVCV500X1000	MULTIUSE GREEN SHEET	500	X 1000	3	2
PVCV500X1500	MULTIUSE GREEN SHEET	500	X 1500	3	2
PVCV1000X1000	MULTIUSE GREEN SHEET	1000	X 1000	3	2
PVCV1000X1500	MULTIUSE GREEN SHEET	1000	X 1500	3	2
PVCV1000X1300	MULTIUSE GREEN SHEET	1000	X 2000	3	1
1 VCV 1000/2000	MOLITOSE GILLIN STILLT	1000	Λ 2000	J	'
PVCBL500X500	MULTIUSE BLUE SHEET	500	X 500	3	4
PVCBL500X1000	MULTIUSE BLUE SHEET	500	X 1000	3	2
PVCBL500X1500	MULTIUSE BLUE SHEET	500	X 1500	3	2
PVCBL1000X1000	MULTIUSE BLUE SHEET	1000	X 1000	3	2
PVCBL1000X1500	MULTIUSE BLUE SHEET	1000	X 1500	3	2
PVCBL1000X2000	MULTIUSE BLUE SHEET	1000	X 2000	3	1
				J	
PVCGR500X500	MULTIUSE GREY SHEET	500	X 500	3	4
PVCGR500X1000	MULTIUSE GREY SHEET	500	X 1000	3	2
PVCGR500X1500	MULTIUSE GREY SHEET	500	X 1500	3	2
PVCGR1000X1000	MULTIUSE GREY SHEET	1000	X 1000	3	2
PVCGR1000X1500	MULTIUSE GREY SHEET	1000	X 1500	3	2
PVCGR1000X2000	MULTIUSE GREY SHEET	1000	X 2000	3	1
PVCN500X500	MULTIUSE BLACK SHEET	500	X 500	3	4
PVCN500X1000	MULTIUSE BLACK SHEET	500	X 1000	3	2
PVCN500X1500	MULTIUSE BLACK SHEET	500	X 1500	3	2
PVCN1000X1000	MULTIUSE BLACK SHEET	1000	X 1000	3	2
PVCN1000X1500	MULTIUSE BLACK SHEET	1000	X 1500	3	2
PVCN1000X2000	MULTIUSE BLACK SHEET	1000	X 2000	3	1

Synthetic glass

High-resistant and luminous

Polystyrene solid sheets have excellent mechanical properties and high resistance to the thermal expansion due to heat. they are high shock resistant, easy to work and apply. Highly transparent and luminous, these products offer innovative solutions.



custom-made

anti-reflective glass and cut to size available on request

RESISTANT

MULTIFUNCTIONAL

LUMINOUS















and cut to size available on request

Synthetic glass

POLYSTYRENE SOLID SHEETS

Use: frames for pictures, poster, photos, screens, home improvement, interior glasses and shower boxes **Cutting:** cut by a box cutter or hacksaw

Drilling: use bits for wood or iron Bending: it can be bend by means of a heat gun

Fixing: use special glue or silicone

Easy to decorate. Recommended for interior environments. **Cleaning:** we recommend to use water and neutral detergent only. Do not use abrasive products.

Meters rolls glass Light, safe and flexible

Transparent multiuse film Easy to shape for any application.











Meters roll GLASS

MULTIFUNCTIONAL

ULTRA-LIGHT

TRANSPARENT FILM WOUND ON A BOBBIN Bobbin 100x1000 | thickness 0.25 | Pack: 1 pc Code PVC025X1X100

Bobbin 50x1000 | thickness 0.75 | Pack: 1 pc Code PVC075X1X50

Technical features: transparent, light, resistant at low temperatures, waterproof **Use:** frames for pictures, poster, photos, home improvement. **Cleaning:** we recommend the use of water and neutral detergent only. Do not use abrasive products.



Synthetic glass POLYSTYRENE SOLID SHEET



Custom-made

anti-reflective glass and cut to size available on request

RESISTANT

MULTIFUNCTIONAL

Code	Description	Measurer	ner	ıts mm	Thk. mm +/-	Min. Qty. pack
PLC500X250X2	SMOOTH CRYSTAL SYNTHETIC GLASS	500	Х	250	2	5
PLC500X500X2	SMOOTH CRYSTAL SYNTHETIC GLASS	500	Х	500	2	5
PLC500X1000X2	SMOOTH CRYSTAL SYNTHETIC GLASS	500	Х	1000	2	5
PLC500X1250X2	SMOOTH CRYSTAL SYNTHETIC GLASS	500	Х	1250	2	5
PLC500X1500X2	SMOOTH CRYSTAL SYNTHETIC GLASS	500	Х	1500	2	5
PLC1000X1000X2	SMOOTH CRYSTAL SYNTHETIC GLASS	1000	Х	1000	2	5
PLC1000X1500X2	SMOOTH CRYSTAL SYNTHETIC GLASS	1000	Х	1500	2	5
PLC1000X2000X2	SMOOTH CRYSTAL SYNTHETIC GLASS	1000	Χ	2000	2	5
PLC500X250X2,5	SMOOTH CRYSTAL SYNTHETIC GLASS	500	Х	250	2,5	5
PLC500X500X2,5	SMOOTH CRYSTAL SYNTHETIC GLASS	500	Χ	500	2,5	5
PLC500X1000X2,5	SMOOTH CRYSTAL SYNTHETIC GLASS	500	Х	1000	2,5	5
PLC500X1250X2,5	SMOOTH CRYSTAL SYNTHETIC GLASS	500	Х	1250	2,5	5
PLC500X1500X2,5	SMOOTH CRYSTAL SYNTHETIC GLASS	500	Х	1500	2,5	5
PLC1000X1000X2,5	SMOOTH CRYSTAL SYNTHETIC GLASS	1000	Х	1000	2,5	5
PLC1000X1500X2,5	SMOOTH CRYSTAL SYNTHETIC GLASS	1000	Х	1500	2,5	5
PLC1000X2000X2,5	SMOOTH CRYSTAL SYNTHETIC GLASS	1000	Χ	2000	2,5	5
PLC500X250X4	SMOOTH CRYSTAL SYNTHETIC GLASS	500	Х	250	4	5
PLC500X500X4	SMOOTH CRYSTAL SYNTHETIC GLASS	500	Х	500	4	5
PLC500X1000X4	SMOOTH CRYSTAL SYNTHETIC GLASS	500	Х	1000	4	5
PLC500X1250X4	SMOOTH CRYSTAL SYNTHETIC GLASS	500	Χ	1250	4	5
PLC500X1500X4	SMOOTH CRYSTAL SYNTHETIC GLASS	500	Χ	1500	4	5
PLC1000X1000X4	SMOOTH CRYSTAL SYNTHETIC GLASS	1000	Χ	1000	4	5
PLC1000X1500X4	SMOOTH CRYSTAL SYNTHETIC GLASS	1000	Χ	1500	4	5
PLC1000X2000X4	SMOOTH CRYSTAL SYNTHETIC GLASS	1000	X	2000	4	5
PLC500X250X5	SMOOTH CRYSTAL SYNTHETIC GLASS	500	Х	250	5	5
PLC500X500X5	SMOOTH CRYSTAL SYNTHETIC GLASS	500	Х	500	5	5
PLC500X1000X5	SMOOTH CRYSTAL SYNTHETIC GLASS	500	Х	1000	5	5
PLC500X1250X5	SMOOTH CRYSTAL SYNTHETIC GLASS	500	Χ	1250	5	5
PLC500X1500X5	SMOOTH CRYSTAL SYNTHETIC GLASS	500	Х	1500	5	5
PLC1000X1000X5	SMOOTH CRYSTAL SYNTHETIC GLASS	1000	Χ	1000	5	5
PLC1000X1500X5	SMOOTH CRYSTAL SYNTHETIC GLASS	1000	Χ	1500	5	5
PLC1000X2000X5	SMOOTH CRYSTAL SYNTHETIC GLASS	1000	Χ	2000	5	5

Multiuse polypropylene sheet

Light, economical and resistant

Alveolar polypropylene sheets are light, easy to shape, and durable.









MULTIFUNCTIONAL

ULTRA-LIGHT

Multiuse sheet



ALVEOLAR POLYPROPYLENE SHEET

Alveolar polypropylene sheets are light, easy to shape, economical and long lasting.

Use: ideal for dividers, coating, wall protection, insulating panels, home improvement works.

Drilling and cutting: panels can be drilled, bended and cut by box cutter or scissors.

Code	Description	Measur	eme	ents mm	Thk. mm +/-	Min. Qty. pack
PAB500X500	MULTIUSE POLYPROPYLENE WHITE SHEET		Х		2,5	5
PAB500X1000	MULTIUSE POLYPROPYLENE WHITE SHEET	500	Х	1000	2,5	5
PAB500X1500	MULTIUSE POLYPROPYLENE WHITE SHEET		Х	1500	2,5	5
PAB1000X1000	MULTIUSE POLYPROPYLENE WHITE SHEET		Х	1000	2,5	5
PAB1000X1500	MULTIUSE POLYPROPYLENE WHITE SHEET		Х	1500	2,5	5
PAB1000X2000	MULTIUSE POLYPROPYLENE WHITE SHEET		X	2000	2,5	5
PAN500X500	MULTIUSE POLYPROPYLENE BLACK SHEET		X	500	2,5	5
PAN500X1000	MULTIUSE POLYPROPYLENE BLACK SHEET		X	1000	2,5	5
PAN500X1500	MULTIUSE POLYPROPYLENE BLACK SHEET		X	1500	2,5	5
PAN1000X1000	MULTIUSE POLYPROPYLENE BLACK SHEET		X	1000	2,5	5
PAN1000X1500	MULTIUSE POLYPROPYLENE BLACK SHEET		X	1500	2,5	5
PAN1000X1900	MULTIUSE POLYPROPYLENE BLACK SHEET		X	2000	2,5	5
PANE500X500	MULTIUSE POLYPROPYLENE NATURAL SHI		X	500	2,5	5
PANE500X1000	MULTIUSE POLYPROPYLENE NATURAL SHI		X	1000	2,5	5
PANE500X1000 PANE500X1500	MULTIUSE POLYPROPYLENE NATURAL SHI			1500		
	MULTIUSE POLYPROPYLENE NATURAL SHI		X		2,5	5 5
PANE1000X1000			Х	1000	2,5	
PANE1000X1500	MULTIUSE POLYPROPYLENE NATURAL SHI		Х	1500	2,5	5
PANE1000X2000	MULTIUSE POLYPROPYLENE NATURAL SHI		Х	2000	2,5	5
PAG500X500	MULTIUSE POLYPROPYLENE YELLOW SHE		Х	500	2,5	5
PAG500X1000	MULTIUSE POLYPROPYLENE YELLOW SHE		Х	1000	2,5	5
PAG500X1500	MULTIUSE POLYPROPYLENE YELLOW SHE		Х	1500	2,5	5
PAG1000X1000	MULTIUSE POLYPROPYLENE YELLOW SHE		Х	1000	2,5	5
PAG1000X1500	MULTIUSE POLYPROPYLENE YELLOW SHE		Х	1500	2,5	5
PAG1000X2000	MULTIUSE POLYPROPYLENE YELLOW SHE		Х	2000	2,5	5
PAV500X500	MULTIUSE POLYPROPYLENE GREEN SHEET		Χ	500	2,5	5
PAV500X1000	MULTIUSE POLYPROPYLENE GREEN SHEET		Χ	1000	2,5	5
PAV500X1500	MULTIUSE POLYPROPYLENE GREEN SHEET		Χ	1500	2,5	5
PAV1000X1000	MULTIUSE POLYPROPYLENE GREEN SHEET		Χ	1000	2,5	5
PAV1000X1500	MULTIUSE POLYPROPYLENE GREEN SHEET		Χ	1500	2,5	5
PAV1000X2000	MULTIUSE POLYPROPYLENE GREEN SHEET		Χ	2000	2,5	5
PABL500X500	MULTIUSE POLYPROPYLENE BLUE SHEET	500	Χ		2,5	5
PABL500X1000	MULTIUSE POLYPROPYLENE BLUE SHEET	500	Χ	1000	2,5	5
PABL500X1500	MULTIUSE POLYPROPYLENE BLUE SHEET	500	Χ	1500	2,5	5
PABL1000X1000	MULTIUSE POLYPROPYLENE BLUE SHEET	1000	Χ	1000	2,5	5
PABL1000X1500	MULTIUSE POLYPROPYLENE BLUE SHEET	1000	Χ	1500	2,5	5
PABL1000X2000	MULTIUSE POLYPROPYLENE BLUE SHEET	1000	Χ	2000	2,5	5
PAGR500X500	MULTIUSE POLYPROPYLENE GREY SHEET	500	Χ	500	2,5	5
PAGR500X1000	MULTIUSE POLYPROPYLENE GREY SHEET	500	Χ	1000	2,5	5
PAGR500X1500	MULTIUSE POLYPROPYLENE GREY SHEET	500	Χ	1500	2,5	5
PAGR1000X1000	MULTIUSE POLYPROPYLENE GREY SHEET	1000	Χ	1000	2,5	5
PAGR1000X1500	MULTIUSE POLYPROPYLENE GREY SHEET	1000	Х	1500	2,5	5
PAGR1000X2000	MULTIUSE POLYPROPYLENE GREY SHEET	1000	Χ	2000	2,5	5
PAR500X500	MULTIUSE POLYPROPYLENE RED SHEET	500	Х	500	2,5	5
PAR500X1000	MULTIUSE POLYPROPYLENE RED SHEET	500	Х	1000	2,5	5
PAR500X1500	MULTIUSE POLYPROPYLENE RED SHEET	500	Х	1500	2,5	5
PAR1000X1000	MULTIUSE POLYPROPYLENE RED SHEET	1000	Х	1000	2,5	5
PAR1000X1500	MULTIUSE POLYPROPYLENE RED SHEET	1000	Х	1500	2,5	5
PAR1000X2000	MULTIUSE POLYPROPYLENE RED SHEET	1000	Х	2000	2,5	5





Safety

Safety barriers

for thermal protection













MADE-TO-MEASURE SHOCKPROOF













SAFETY BARRIERS FOR THERMAL PROTECTION

Radiator Covers are available in four models.

Tube-shaped CTT

Tube-shaped standard series CTTB Tube-shaped reinforced series CTTR Playground activity panels for radiator cover (CTG) (Trafil patent)

The tube-shaped structure is manufactured in non-toxic, acrovinyl and fireproof PVC, Class 1. External supporting structure has a diameters of 50 mm and thickness of 2 mm. Internal tube-shaped structure with 32 mm diameters and thickness 2 mm. Playground activity panel in expanded PVC, thickness of 3 mm. The quality of the materials guarantees safety and stability. The distance between the vertical tubes complies with the international standard UNI 108090 to guarantee the impossibility to pass through the barrier. The hot air distribution is assured by an open structure in both tube-shaped and playground activity panel version.

Use: protection for kids in the event of accidental impacts, we recommend the use in schools, kindergartens, playgrounds, baby parking and game rooms. Installation: modular structure


according to measurements required, brackets childproof, interlocking connectors of the same color of the structure.

External supporting structure: tube of Ø 50 mm blue and white. Internal tube-shaped structure:

tube of Ø 32 mm red, blue, yellow, green and white.

Playground activity panel for radiator cover: white (toys are not included), white, blue and red connectors.

Cleaning: clean with water and neutral detergent.



TOPS, FEETS, OPENABLE ELASTIC **STRIPS**





Cod.: CTT



OPENABLE FASTENING **SYSTEM**

IRON STRENGTHENING INSIDE






















playground activity panel for radiator cover

RADIATOR COVER ■ Cod. : CTG

















Ideal for kindergartens and primary schools

Q Accessories included:

OPENABLE ELASTIC STRIPS, OPENABLE FASTENING SYSTEM, TOPS, FEETS.









Safety barriers



various protections

Cod.: CTT





FITTINGS COLORS



COLORS TUBES EXTERNAL STRUCTURE



COLORS TUBES INTERNAL STRUCTURE



finger alert
















FINGER ALERT

Finger pinch protection Length: 1.2 / 1.5 / 1.8 meters Maximum opening of the door: 110° and 180° Use: protection to prevent accidental fingers injuries. The finger alert fills the space between the door and the doorframe.

Suggested applications: kinder-gardens, schools, playgrounds, baby-parking, domestic environment.

Code: AV110-120 AV110-150 AV110-180 Code: AV180-180







Protection profiles

shock resistant Corner cover

FLEXIBLE








tabella colore PVC flessibile trasparente



SHOCK RESISTANT CORNER COVER

Flexible PVC wall protection corner cover 35x35 mm Thickness 3 mm | 2 meters bars Pack: 50 meters Use: tube and rounded angle are effective corner protections Recommended applications: schools,

kindergartens, hospitals, public places and wherever it is necessary to prevent injuries Code M12





MADE IN ITALY

shock resistant Corner cover

Colors: AV01 MATITA

FLEXIBLE



25

SHOCK RESISTANT CORNER COVER

Flexible PVC wall protection corner cover 25x25 mm | Thickness 1 mm | 2 meters bars Pack: 50 meters Use: tube and rounded angle are effective corner protections Recommended applications: schools, kindergartens, hospitals, public places and wherever it is necessary to prevent injuries

Code AV02





shock resistant Corner cover

Corner cover 70x70 mm |1 meter bar Pack: 1 meter Use: corner guard and design Suggested applications: schools, kinder-gardens, public and domestic environment and wherever it is requested a safe protection. Code AV01 MATITA





on request Colors range for flexible PVC

Measures: 1000x70x70 mm

SHOCK-RESISTANT

Flexible PVC wall protection

protection profile





Wall protection rolls easy to transport

Flexible wall protection height 100







FLEXIBLE

VERSATILE

WALL PROTECTION 100 Flexible PVC Wall protection 100 mm Height 100 mm | thickness 3 mm 40 meters rolls and 10 meters rolls Pack: 80 meters Use: protection against bumps of chairs, tables, stretchers, shoes

Recommended applications: food industry, hospitals, schools, laboratories, etc.

Code M14, M14-10





40 m

M14-10

M14

Flexible wall protection height 200





Height 200 mm | thickness 3.5 mm 20 meters rolls Use: protection against bumps of chairs, tables, stretchers, shoes Recommended applications: food industry, hospitals, schools, laboratories, etc.

Code M38













20 m

safety





PVC wall protection Protection Profile





























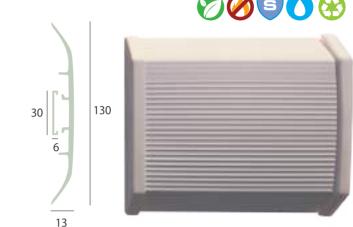







WALL PROTECTION

Height 130 mm | length 2000 mm | width 13 mm | Pack: 30 meters. Wall protections are made in PVC: PVC is self-exstinguishing, shockproof, environmentally-friendly and recyclable.

Application: Fix the special support profile (supplied with the assembly kit) with screws and screws anchors, then apply pressure to install the wall protection. It is possible to put electric or telephone wires inside the profile using its specific separate internal spaces. Connecting joints and terminals are available. The number of terminals and joints depends on the number of wall protection being used.


Use: PVC wall protections are particularly suitable to use in homes, offices, waiting rooms, rest homes, hospitals, schools, supermarkets, workshops and wherever walls are particularly exposed to possible damage. PVC is class V0 fireproof. Special colors are available on request

Code 1C1

Code 1C3 - TERMINAL

Code 1C4 - JOINT

KIT LED: 1 Aluminium "U" profile, 1 strip led, 1 power supply.



Protection profiles

shockproof

standard colors



The colors are mixed within the raw materials. Cadmium and heavy metals free.

Features:

- Acrovinyl profiles with tin shockproof
- Fine embossing materials
- "V0" nylon terminals, non-halogen non-carcinogenic
- No bacterial growth
- Class 1 fire-safe
- Support profile in extruded aluminium











SURCHARGE

Extra charge will be applied for red, dark green and aluminium colors

SPECIAL COLORS

Minimum order for acrylic-vinyl profile is 1000 meters

Slight color variation can occur between acrylic-vinyl profile and "V0" nylon elements DUG different materials and

Used materials meet European directive 2002/95/CE January 27, 2003, aligned with RoHS standard for plastic materials (unleaded and without heavy metals). The materials comply with EU rules and with RoHs Rule about plastics.

modular Handrail





MODULAR HANDRAIL

Aluminium handrail Ø 35 mm Acrilic-vinyl covering 6 meters bars

Code M-35MS "V0" nvlon brackets

Code M-35TM

"V0" nylon terminals

Code M-35AG

"V0" nylon 90° corners

Code M-35AS

"V0" nylon 150° corners

Code M-35INN

"V0" nylon insert

Code M-35L

Supplied with application kit





corner bumper

CORNER BUMPER 30X30

Thickness 2 mm | 6 meters bars Code S30-E

CORNER BUMPER 50X50

Thickness 2 mm | 6 meters bars Code S50-E

CORNER BUMPER 70X70

Thickness 2.5 mm | 6 meters bars Code S70-E

CORNER BUMPER 100X100

Thickness 2 mm | 3 meters bars Product available on request: minimum order of 18 meters Code S100-E

CORNER BUMPER 150X150

Thickness 2 mm | 3 meters bars Product available on request: minimum order of 12 meters Code S150-E



APPLICATION:

SHOCKPROOF

application with waterbased or silicone glue



SHOCK-ABSORBING CORNERS 57X57

Aluminium supporter Profile with acrilyc-vinyl covering Thickness 3 mm | 6 meters bars Code S-57

Support profile with nylon "v0" self-centring of corners & terminals Code S-57TM

SHOCK-ABSORBING CORNERS 77X77

Aluminium supporter Profile with acrilyc-vinyl covering Thickness 3 mm | 6 meters bars Code S-77


Support profile with nylon "v0" self-centring of corners & terminals Code S-77TM


APPLICATION:



SHOCKPROOF

shock-absorbing







MODULAR HANDRAIL

Aluminium handrail Ø 40 mm Acriliyc-vinyl covering 1 meters bars Code M-40L

"V0" nylon brackets

Code M-40MS


"V0" nylon (90°-150°) corners

Code M-40AG

"V0" nylon (90°-150°) terminals Code M-40TM

Supplied with application kit

modular Handrail




Protection profiles


shockproof

buffer handrail









BUFFER HANDRAIL

Aluminium support profile Acriliyc-vinyl covering 140 mm | thickness 3mm | 5 meters bars Code M-140CC

Brackets fixing Code M-140MS

Nylon "V0" self-centring corners Code M-140AG


Nylon "V0" self-centring terminals

Códe M-140TM

Supplied with application kit

shock-absorbing buffer





SHOCK-ABSORBING BUFFER

Aluminium support profile Acrilyc-vinyl covering | 5 meters bars Code P-200A
Galvanized steel bracket
Code P-200MS

Nylon "V0" self-centring of terminals


Code P-200TM

Nylon "V0" self-centring of corners

Code P-200AG

Supplied with application kit







bumper **strip**





BUMPER STRIP bumper strip thickness 2 mm | 3 meters bars Height mm: 100/150/200/250/300/430/650/1000/1300 Code SERIE F2











Research and Custom-made design

The future of plastic

We are in constant evolution, collaborating with research and innovation centres, trying to find new polymerics and more innovative processes. Plastic is an environmentally-friendly material and when correctly disposed and reused, plastic is also a sustainable resource.









orruna zroncia intelligenta Urbioshile ad terbolos w medicelos pomecros (Veuro pado)









Sales optimization

Display units Sales Optimizations

The new display units support the purchases.

Ordered and well-exposed products optimize space and communicate actively. The display dispensers organize the variety and the availability of the products, facilitating the concept of cash and carry.



Display unit for Multifunzione and Multisystem skirting board

The display unit has the following measurements: h. 270 x w. 124 x d. 50 cm

Code ESP01

Display unit for skirting boards and PVC corner covers

The display unit has the following measurements: h. 310 x w. 70 x d. 45 cm Code ESP02





Display unit for flexible PVC profiles

The display unit has the following measurements: h. 260 x w. 70 x d. 45 cm Code ESP03



sales optimization




Display unit for flexible PVC skirting boards, wall protections, joints and step protections

The display unit has the following measurements: h. 160 x w. 65 x d. 52 cm Code ESP05

Troff

◆ Display unit for polystyrene crystal wall guard 800x80 mm

Wall guards are packed separately with bar code and assembly kit included. The display unit has the following measurements: h. 160 x w. 34 x d. 42 cm Code ESP12

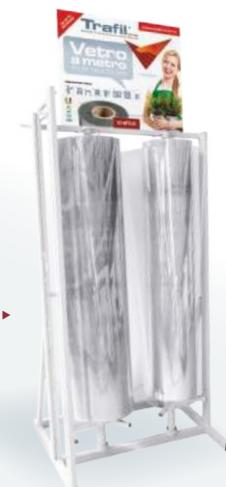

Display unit for meters roll glass ▶

Transparent multiuse film. Easy to shape for any application The display unit has the following measurements: h. 166 x w. 80 x d. 50 cm Code ESP13



Trafil suitecase

A wide selection of ready samples. Code VAL

Display units Sales Optimizations

The dispenser are composed according to customers needs and requests.

Display unit for synthetic glass

▼ The display unit has the following measurements: h. 200 x w. 50 x d. 50 cm Code ESP11





Display unit for multiwall polycarbonate sheets, synthetic glass, safe mirror and multiuse sheets

The display unit has the following measurements: h. 240 X w. 159 X d. 105 cm Code Esp10

1.SUBJECT

These terms of Sale and Delivery shall apply to sales contracts and supplies contracts (hereinafter referred to as "Contract products"). General conditions of purchase of the buyer shall not apply to these contracts.

The Customer provides the Supplier with specific written orders including features of the required product, its price and terms of delivery. Orders shall be binding on the Supplier only after having received a written confirmation from the Customer.

2.PRICE LIST

Prices applied for each sale are those applicable on the date of the order. Prices do not include packing costs, delivery prices, insurance costs and any further charges (fees, taxes, etc.). Rates may vary with immediate effect, without prior notice. All payments shall be made in Euros.

3.COMMISSION

Any offer shall be valid only if prepared at the currently valid costs of material and wages. Orders shall be binding on Trafilplast srl only after having received a written and signed confirmation from the Customer. Articles, measurements, quantities and colours shall be checked by the Customer, who accepts full responsibility.

4.INFORMATION AND STRUCTURAL FEATURES

All measurements and capacities of the goods quoted in all offers and order confirmations shall be considered as approximate. In particular, no good can be rejected in execution of the contract, objecting the application of changes which have been introduced after the conclusion of the contract. The Supplier shall not be required to amend products after the order.

5.CUSTOM PACKAGING

Any supply request in customized packaging will be subjected to surcharges.

6.SHIPPING

Shipping is regulated by Incoterms 2020. Sales are concluded under FCA.

7.DELIVERY

Unless otherwise agreed, the delivery of the Contract products takes place at the premises of the Supplier. The period of delivery shall start from the date on which the Supplier has received the signed order confirmation. All delivery dates shall be noncommittal. The period of delivery shall be stipulated for each individual case upon placing of the order.

Potential delays shall not be eligible for refunds, compensations or cancellation of the transaction. The Supplier shall not be liable for delays caused by force majeure, including claims, machine faults, strikes, lack of raw materials supplying, etc. On transferring the goods, the Customer assumes responsibility for risks inherent to Contract products. If the Customer does not take charge of the Contract products within 7 days following their readiness, risks shall pass over the Customer upon receipt of the report of Supplier's readiness to dispatch the Contract products and the costs of custody are at the complete charge of the Buyer. Once the deadline of 7 working days, mentioned above, expires, the order is deemed automatically cancelled. The Supplier has to send a written communication of the contract resolution that has to be sent by certified letter or equivalent, notwithstanding the right to compensation for any damage incurred.

8.PAYMENT

All payments shall be made by advanced bank transfer.

9.DELAY OF PAYMENT

In case of delay in payment caused by the Customer, the legal rate of interest calculated, based on Legislative Decree n. 231/2002 and subsequent amendments, will be charged. Until all outstanding amounts including dunning costs and default interest have been paid, the Supplier shall not be obliged to make any further delivery under current orders.

10.WARRANTY

The Supplier shall give a warranty period of 12 months as of the date the goods are delivered. The Customer shall check the Contract products at the moment of delivery, in the presence of the carrier, to verify whether there are damages or shortfalls. In such circumstances, the Customer shall affix "Subject to SPECIFIC control" on the carrier document. The document can be both printed or electronic, in both cases the Customer shall be accurate with the goods unchecked, for example damaged goods, unwrapped goods, broken goods, etc. The Customer shall take photos of damaged goods and promptly report it to the Supplier. The Customer will not be able to file a claim for all unchecked goods received with general control. Any flaws or defects will not imply the contract resolution or the right of the Customer to claim compensation. In case of damages, if not required by mandatory law, the Supplier's liability is excluded.

11.CONDITIONS OF WARRANTY APPLICATION

Any defects must be reported within seven (7) days from their discovery.

Otherwise, the Customer shall lose his warranty rights if:

- a. He receives goods, does not check them and does not promptly report it to the Supplier;
- b. The price is not paid within the timeframes agreed;
- c. Terms and Conditions provided by the Supplier are not complied with;
- d. Contract products are modified without the approval of the Supplier or repaired by third party, unrelated to the Supplier's assistance.

In case of valid communication under warranty, the Supplier will exclusively replace the product recognized as defective, that has to be returned to the Supplier in its original condition, intact and undamaged. In the event of complaints or returns, the Customer shall not be allowed to suspend pending payments.

12.RESTRICTION TO THE USE OF TERMS AND CONDITIONS

The Customer shall not use purchased Contract products for any use other than its intended use. Any responsibility arising from the improper use, even if permitted by the Supplier, shall be borne exclusively by the Customer. Non-compliance with this prohibition implies the immediate expiry of the right to the warranty of the Customer.

13.TOLERANCES

Any measurements and capacities of the goods shall be considered as approximate. They may vary as shown in Table DIN 16491- 3B an 16491-4B. The weight of the products is never binding.

14.RESERVATION OF TITLE

In case of deferred payments, the Supplier has the right to retain title to the goods until the purchase price has been paid in full. Despite the reservation of title from the Supplier, any risk on goods shall be assumed by the Customer from the conclusion of the contract. This reservation shall be affixed on all Supplier's invoices of subsequent deliveries and registered on all accounting entries where the good is intended to move further.

15.GOVERNING LAW AND COURT OF JURISDICTION

Any disputes arising out of or in connection with these Terms of Sale and Delivery (Agreement), shall be subjected to the exclusive jurisdiction of the city of Turin Law Court, excluding other Law Courts. For any doubt and/or interpretation relating to these Terms of Sale and Delivery (Agreement), only the Italian Law is binding, excluding other Laws or International Conventions.



TRASFORMING PLASTIC FOR A BETTER FUTURE

Via Peschiere, 52 - 10040

